



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**COLOUR MIXING CUP ADAPTING ASSEMBLY FOR CONNECTING THE CUP TO A
GRAVITY FEED PAINT SPRAYER**

5

Field of the Invention

The present invention relates to the liquid supply assemblies for gravity fed liquid (e.g., paint) spraying devices or spray guns.

10

Background of the Invention

Various liquid supply assemblies have been described for use with gravity fed liquid (e.g., paint) spraying devices or spray guns, including those described in the international application published as International Publication Number WO 98/32539 on July 30, 1998. The supply assembly including a collapsible liner that is described and
15 claimed in that application should provide advantages over the prior art liquid supply assembly also described in that application.

Disclosure of the Invention

The present invention provides a liquid supply assembly for use with gravity fed
20 liquid spraying devices that, like the liquid supply assembly described and claimed in WO 98/32539, should also provide advantages over the prior art liquid supply assembly described in that application.

According to the present invention there is provided a liquid supply assembly adapted for use on a gravity fed liquid spraying device that comprises (1) a mixing cup of
25 stiff polymeric material that bears indicia on its side wall indicating the levels to which a plurality of different liquids should be sequentially poured into the cup to achieve a predetermined ratio between the liquids; (2) a first adapter comprising a central portion having a through opening and a transverse portion including a peripheral part defining a groove along its inner surface adapted for sealing engagement with a top end of the mixing
30 cup; (3) a second adapter having a through opening, a first end portion adapted to releasably engage the inlet port of the spraying device; and a second end portion having a connector part adapted for releasable liquid tight engagement with a connector part on the central portion of the first adapter with the through openings in communication.

The mixing cup is of a known type commonly used in paint shops to mix different paints and/or to mix paint with solvent. Those liquids are mixed using indicia on the side walls of the mixing cup. That indicia indicates the levels to which two or three different liquids should be sequentially poured into the mixing cup to provide a predetermined ratio
5 between those liquids, such indicia being provided for a plurality of different ratios. Prior to this invention, liquid from the mixing cup was poured into a liquid supply assembly for a spray gun, and if liquid remained after the spraying operation was complete, that remaining liquid was sometimes poured back into the mixing cup, an air tight cover was applied thereto, and the liquid (e.g., paint) was stored for future use in the covered mixing
10 cup.

The present invention affords further use of that mixing cup as part of the liquid supply assembly for the spraying device. This eliminates the need to pour the mixed liquid (e.g., paint) out of the mixing cup prior to spraying, or to pour unsprayed liquid back into the mixing cup after the spraying operation. Instead, the liquid is mixed in the
15 mixing cup, remains in the mixing cup during the spraying operation when the mixing cup becomes part of the liquid supply assembly for the spraying device, and if unsprayed liquid remains after the spraying operation, it can be retained in the mixing cup which is then separated from the rest of the liquid supply assembly and can have a conventional air tight cover applied to it for storage.

A vacuum relief for the liquid supply assembly can be provided by inserting a tapered removable pin (e.g., a pin of the type sometimes called a "push pin") through the side wall of the mixing cup adjacent its bottom wall. That pin is removed during use of the mixing cup in the liquid supply assembly for the spraying device when the mixing cup is positioned with its bottom wall uppermost so that air can enter the cup through an air
20 passageway formed by the pin above the liquid being supplied to the spraying device. Before and after the spraying operation when the cup is supported on its bottom wall that pin may be positioned in the passageway it forms to preclude liquid leaking out of the mixing cup through that passageway.

The liquid supply assembly can also include a removable filter assembly for
30 filtering liquid leaving the mixing cup during the spraying operation.

Brief Description of Drawing

The present invention will be further described with reference to the accompanying drawing wherein like reference numerals refer to like parts in the several views, and wherein:

5 Figure 1 is an exploded perspective view of a liquid supply assembly according to the present invention;

 Figure 2 is an enlarged sectional view taken approximately along section line 2-2 of Figure 1;

 Figure 3 is an enlarged exploded perspective view of the liquid supply assembly of
10 Figure 1 together with a fragment of a spraying device or spray gun to which the liquid supply assembly is adapted to be attached;

 Figure 4 is an end view of a second adapter included in the liquid supply assembly of Figure 1;

 Figure 5 is a perspective view of the liquid supply assembly of Figure 1 attached to
15 an inverted spraying device or spray gun;

 Figure 6 is a perspective view of the liquid supply assembly of Figure 1 attached to the spraying device as in Figure 5 and inverted to the position used for spraying liquid with the spraying device; and

 Figure 7 is a perspective view of a mixing cup included in the liquid supply
20 assembly of Figure 1, which mixing cup has been separated from the rest of the liquid supply assembly and has had a conventional cover applied to it.

Detailed Description of the Invention

 Referring now to the drawing there is illustrated a liquid supply assembly
25 according to the present invention generally designated by the reference numeral 10. That liquid supply assembly 10 (as is illustrated in Figures 3, 5 and 6) can be used to supply liquid for a conventional gravity fed liquid spraying device or spray gun 11 (e.g., the spray gun commercially designated NR 95 that is available from Sata, Farbspritztechnik GmbH & Co., Kornwestheim, Germany).

30 As is best seen in Figures 1 and 3, the liquid supply assembly 10 includes a conventional paint mixing cup 12 of stiff polymeric material (e.g., the polyethylene mixing cups commercially available from PPG, Cleveland, Ohio, which can be obtained in

8 ounce or 240ml, or 16 ounce or 480ml, or 24 ounce or 720ml, or 32 ounce or 960 ml sizes). The paint mixing cup comprises a generally cylindrical side wall 13 having top and bottom ends 14 and 15, a bottom wall 16 extending across and closing the bottom end 15 of the side wall 13, and an outwardly projecting lip 18 around the top end 14 of the side wall 13. The top end 14 of the side wall 13 defines an opening into the cup 12. The side wall 13 bears indicia 19 indicating the levels to which two or three different liquids should be sequentially poured into the cup 12 through that opening to provide a predetermined ratio between those liquids, that indicia 19 being provided for a plurality of different ratios. The side wall 13 is sufficiently translucent to afford seeing the liquid level in the cup 12 through the side wall 13 which assists a person in adding liquids to the desired levels indicated by the indicia 19.

The liquid supply assembly 10 also includes a first adapter 20, (see Figures 1, 2, and 3) preferably molded of polymeric material (e.g., polyethylene), having opposite inner and outer major surfaces 21 and 22. The first adapter 20 comprises a central generally cylindrical portion 24 having a through opening 26 and a transverse portion 28 including a peripheral part 30. The transverse portion 28 defines a groove 32 along its inner surface that is adapted for sealing engagement with the top end 14 and outwardly projecting lip 18 of the paint mixing cup 12.

A second adapter 34 (see Figures 1, 2, 3, and 4), also included in the liquid supply assembly 10, is preferably of metal (e.g., aluminum), has first and second spaced end portions 36 and 38, and has a through opening 40 extending through those end portions 36 and 38. The first end portion 36 of the second adapter 34 has internal threads 41 and six flattened wrench engageable surface portions 42 around its periphery, thereby being adapted to be releasably engaged with external threads on the inlet port of the gravity feed spray gun 11. The first adapter 20 and the second end portion 38 of the second adapter 34 have connector parts that are adapted for releasable liquid tight engagement with their through openings 26 and 40 in communication. Those connector parts include axially spaced radially outwardly projecting sealing rings 43 along the outer surface of the cylindrical portion 24, and a cylindrical inner surface 44 of the second adapter 34 that defines a cylindrical bore opening through the end of the second adapter 34 opposite the threads 41. That bore is adapted to receive the cylindrical portion 24 of the first adapter 20 in an engaged position with the sealing rings 43 in slightly compressed liquid tight engagement

with the inner surface 44 defining the bore and with an end surface 46 on a collar 45 around the second end portion 38 of the second adapter 34 abutting a boss 47 in the first adapter 20 around the cylindrical portion 24. The collar 45 has major cylindrically concave recesses 48 along opposite sides of its periphery (see "Figure 4) adapted to pass the distal ends of hook members 49 projecting from the transverse portion 28 of the first adapter 20 on opposite sides of the cylindrical portion 24 when the cylindrical portion 24 is pressed axially into the bore with the first and second adapters 20 and 34 in a first relative position at which the hook members 49 are aligned with the major recesses 48 in the collar 45. The first and second adapters 20 and 34 can then be rotated relative to each other to a second relative position to cause the resiliently flexible projecting hook members 49 to be deflected outwardly by, and to move around, cylindrically convex cam lobes 50 projecting radially outwardly on corresponding sides of the major recesses 48 until the projecting hook members 49 are positioned in minor cylindrically concave recesses 51 in the collar 45 at which opposed inwardly projecting lips 52 on the distal ends of the projecting hook members 49 are engaged over a surface 53 of the collar 45 adjacent the first end 36 of the second adapter 34. Lugs 54 projecting axially past the end surface 46 of the collar 45 are adapted to move between positions engaging sides of the boss 47 on the first adapter 20 when the cylindrical portion 24 is in its engaged position in the bore defined by the inner surface 44, thereby limiting relative movement between the adapters 20 and 34 to movement to and between those first and second relative positions.

The liquid supply assembly 10 further includes a tapered, pointed, removable pin 56 (e.g., a pin of the type sometimes called a "push pin") extending through a passageway 58 in the side wall 13 of the cup 12 adjacent its bottom wall 16 (see Figures 1 and 5). On the end of the pin 56 opposite its point is a molded head 60 by which the pin 56 can be manually pressed through the side wall 13 to form the passageway 58. When the cup 12 is inverted to supply liquid to the spray gun 11 as is illustrated in Figure 6, the pin 56 can be removed so that the passageway 58 will provide vacuum relief for the cup 12 by then allowing air to enter the cup 12 through the passageway 58 above the liquid (e.g., paint) being supplied to the spray gun 11. Before and after any such spraying operations that pin 56 may be positioned in the passageway 58 as is illustrated in Figure 5 to preclude liquid within the cup 12 from leaking through the passageway 58 when the cup is supported on its bottom wall 16.

The combination 10 can also include a removable filter assembly 62 (see Figures 2 and 3) of a known commercially available type (e.g., the filter commercially designated "paint filter kit" that is commercially available from Standard Color, St. Paul, MN). The filter assembly 62 includes a stiff polymeric frame comprising a cylindrical outlet portion 64 having a cylindrical outer surface frictionally engaged within the inner surface defining the through opening 26 in the central portion 24, which outlet portion 64 has a through opening. The frame of the filter assembly 62 further includes an inlet portion 66 projecting from the inner surface 21 of the transverse portion 28 of the first adapter 20. The inlet portion 66 has four axially extending rectangular inlet passageways 67 spaced around its periphery that communicate with the through opening in the outlet portion 64, and includes a filter screen 68 extending across the inner ends of those inlet passageways 67.

A method according to the present invention for providing a supply of mixed liquids for the gravity fed liquid spraying device 11 includes mixing the liquids in the mixing cup 12 using the indicia 19 to indicate the levels to which the liquids should be sequentially poured into the cup 12 to achieve the desired ratio between the liquids; engaging the peripheral part 30 of the first adapter 20 with the top end 14 of the mixing cup 12 containing the mixed liquids; engaging the first end 36 of the second adapter 34 with the inlet port of the liquid spraying device 11 (if this has not already been done); engaging the connector parts as described above (this being done with the mixing cup supported on its bottom wall and the spraying device inverted as illustrated in Figure 3); and positioning the spraying device 11 as illustrated in Figure 4 so that the bottom wall 16 of the mixing cup 12 is uppermost to feed the liquid in the mixing cup 12 to the spraying device 11 through the filter assembly 62 and the openings 26 and 40 in the adapters 20 and 34. That method can further include inserting the tapered pin 56 through the side wall 13 of the mixing cup 12 adjacent its bottom wall 16, and removing the tapered pin 56 from the side wall 13 after the spraying device 11 is positioned with the bottom wall 16 of the mixing cup 12 uppermost as illustrated in Figure 4 to feed the liquid in the mixing cup 12 to the spraying device. Such insertion of the tapered pin 56 provides the passageway 58 through the side wall 13 of the mixing cup 12 adjacent its bottom wall 16 so that air can flow into the cup 12 through the passageway 58 as the liquid is sprayed to restrict causing a vacuum in the mixing cup 12. If liquid remains in the mixing cup 12 after use of the

liquid spraying device 11, the pin 56 can be inserted through the passageway 58 to restrict leakage of liquid through the passageway 58; the spraying device 11 can again be inverted to the position illustrated in Figure 3, the connector parts can be disconnected, the first adapter 20 can be removed from the top end 14 of the mixing cup 12 containing the
5 remaining liquid; a conventional cover 70 (see Figure 7) can be applied to the top end 14 of the mixing cup 12, and the remaining liquid can be stored for future use in the covered mixing cup 12. The inexpensive first adapter 20 and the filter assembly 52 can then be disposed of so that cleanup of the liquid supply assembly 10 only requires cleaning the second adapter 34, which is cleaned with the spray gun 11.

10 The present invention has now been described with reference to one embodiment thereof. It will be apparent to those skilled in the art that many changes can be made in the embodiment described without departing from the scope of the present invention. For example, any of a number of different types of connectors can be used between the adapters 20 and 34. Thus, the scope of the present invention should not be limited to the
15 structures and methods described in this application, but only by the structures and methods described by the language of the claims and the equivalents thereof.

What is Claimed is:

1. A liquid supply assembly for use on a gravity fed liquid spraying device, said supply assembly comprising:

5 a mixing cup of stiff polymeric material comprising a side wall having top and bottom ends, and a bottom wall extending across and closing the bottom end of said side wall, said top end of said side wall defining an opening into said cup, and said side wall bearing indicia indicating the levels to which a plurality of different liquids can be sequentially poured into the cup to achieve a predetermined ratio between the liquids;

10 a first adapter of polymeric material having opposite inner and outer major surfaces, said first adapter comprising a central portion having a through opening and a transverse portion including a peripheral part defining a groove along said inner surface adapted for sealing engagement with said top end of said mixing cup, and;

15 a second adapter having first and second spaced end portions and a through opening extending through said end portions, said first end portion being adapted to releasably engage the inlet port of the gravity fed liquid spraying device;

said second end portion of said second adapter and said central portion of said first adapter having connector parts adapted for manually releasable liquid tight engagement between said adapters with said through openings in communication.

20 2. An assembly according to claim 1 further including a tapered removable pin extending through said side wall of said mixing cup adjacent said bottom wall.

25 3. An assembly according to claim 1 further including a removable filter assembly including a frame comprising an outlet portion engaged across said through opening in said central portion and having a through opening, said frame further including an inlet portion projecting from the inner surface of said first adapter and having inlet passageways communicating with said through opening in said outlet portion, and a filter screen extending across said inlet passageways.

30 4. Adapters for using as part of a liquid supply assembly for a gravity fed liquid spraying device a mixing cup of stiff polymeric material comprising a side wall

having top and bottom ends, and a bottom wall extending across and closing the bottom end of said side wall, said top end of said side wall defining an opening into said cup, and said side wall bearing indicia indicating the levels to which a plurality of different liquids can be sequentially poured into the cup to achieve a predetermined ratio between the liquids; said adapters comprising:

a first adapter of polymeric material having opposite inner and outer major surfaces, said first adapter comprising a central portion having a through opening and a transverse portion including a peripheral part defining a groove along said inner surface adapted for sealing engagement with said top end of said mixing cup, and;

a second adapter having first and second spaced end portions and a through opening extending through said end portions, said first end portion being adapted to engage the inlet port of the gravity fed liquid spraying device;

said second end portion of said second adapter and said central portion of said first adapter having connector parts adapted for manually releasable liquid tight engagement between said adapters with said through openings in communication.

5. Adapters according to claim 4 further including a tapered removable pin adapted to extend through said side wall of said mixing cup adjacent said bottom wall.

6. Adapters according to claim 4 further including a removable filter assembly including a frame comprising an outlet portion engaged across said through opening in said central portion and having a through opening, said frame further including an inlet portion projecting from the inner surface of said first adapter and having inlet passageways communicating with said through opening in said outlet portion, and a filter screen extending across said inlet passageways.

7. A method for providing a supply of mixed liquids for a gravity fed liquid spraying device, said method comprising the steps of:

providing a mixing cup of stiff polymeric material comprising a side wall having top and bottom ends, and a bottom wall extending across and closing the bottom end of said side wall, said top end of said side wall defining an opening into said cup, and said

side wall bearing indicia indicating the levels to which the liquids can be sequentially poured into the cup to achieve a predetermined ratio between the liquids;

5 providing adapters including a first adapter of polymeric material having opposite inner and outer major surfaces, said first adapter comprising a central portion having a through opening and a transverse portion including a peripheral part defining a groove along said inner surface adapted for sealing engagement with said top end of said mixing cup, and a second adapter having first and second spaced end portions and a through opening extending through said end portions, said first end portion being adapted to engage an inlet port of the gravity fed liquid spraying device; said second end portion of
10 said second adapter and said central portion of said first adapter having connector parts adapted for manually releasable liquid tight engagement between said adapters with said through openings in communication;

15 mixing the liquids in the mixing cup using the indicia to indicating the levels to which the liquids are poured into the cup to achieve a predetermined ratio between the liquids;

engaging the first adapter with the top end of the mixing cup containing the mixed liquids;

engaging the first end portion of the second adapter with the inlet port of the gravity fed liquid spraying device;

20 manually engaging the connector parts; and

positioning the spraying device so that the bottom wall of the mixing cup is uppermost to feed the liquid in the mixing cup to the spraying device through the openings in the adapters.

25 8. A method according to claim 7 further including the steps of inserting a tapered pin through the side wall of the mixing cup adjacent said bottom wall, and removing the tapered pin from the side wall during the positioning step to provide an air passageway through the side wall of the mixing cup adjacent said bottom wall.

30 9. A method according to claim 7 further including the steps, used when liquid remains in the mixing cup after use of the liquid spraying device, of manually separating the connector parts to separate the adapters, removing the first adapter from the

top end of the mixing cup containing the remaining liquid; applying a cover to the top end of the mixing cup, and storing the remaining liquid in the covered mixing cup.

10. A method according to claim 9 further including the steps of inserting a tapered pin through the side wall of the mixing cup adjacent said bottom wall, removing the tapered pin from the side wall during the positioning step to provide an air passageway through the side wall of the mixing cup adjacent said bottom wall; and reinserting the pin through the passageway to restrict leakage of liquid through the passageway during the steps of removing the first adapter, applying the cover, and storing.

10

11. A method according to claim 7 further including the step of manually separating the connector parts to separate the adapters, removing the first adapter from the top end of the mixing cup, and disposing of the first adapter.

12. A method according to claim 7 further including the steps, used when no liquid remains in the mixing cup after use of the liquid spraying device, of manually separating the connector parts to separate the adapters, and disposing of the first adapter and the mixing cup.

13. A method according to claim 7 further including the steps, used when liquid remains in the mixing cup after use of the liquid spraying device, of manually separating the connector parts to separate the adapters, removing the first adapter from the top end of the mixing cup containing the remaining liquid; disposing of the first adapter, applying a cover to the top end of the mixing cup, and storing the remaining liquid in the covered mixing cup.

25

14. A liquid supply assembly for use on a gravity fed liquid spraying device, said supply assembly comprising:

a mixing cup of stiff polymeric material comprising a side wall having top and bottom ends, and a bottom wall extending across and closing the bottom end of said side wall, said top end of said side wall defining an opening into said cup, and said side wall


30

bearing indicia indicating the levels to which a plurality of different liquids can be sequentially poured into the cup to achieve a predetermined ratio between the liquids;


an adapter assembly having opposite inner and outer major surfaces, said adapter assembly comprising a transverse portion including a peripheral part defining a groove
5 along said inner surface adapted for sealing engagement with said top end of said mixing cup, and a first end portion opposite said transverse portion adapted to releasably engage the inlet port of the gravity fed liquid spraying device, said inner surface defining a through opening extending through said transverse portion and said first end portion;

said assembly further including a tapered removable pin extending through said
10 side wall of said mixing cup adjacent said bottom wall.


1/4

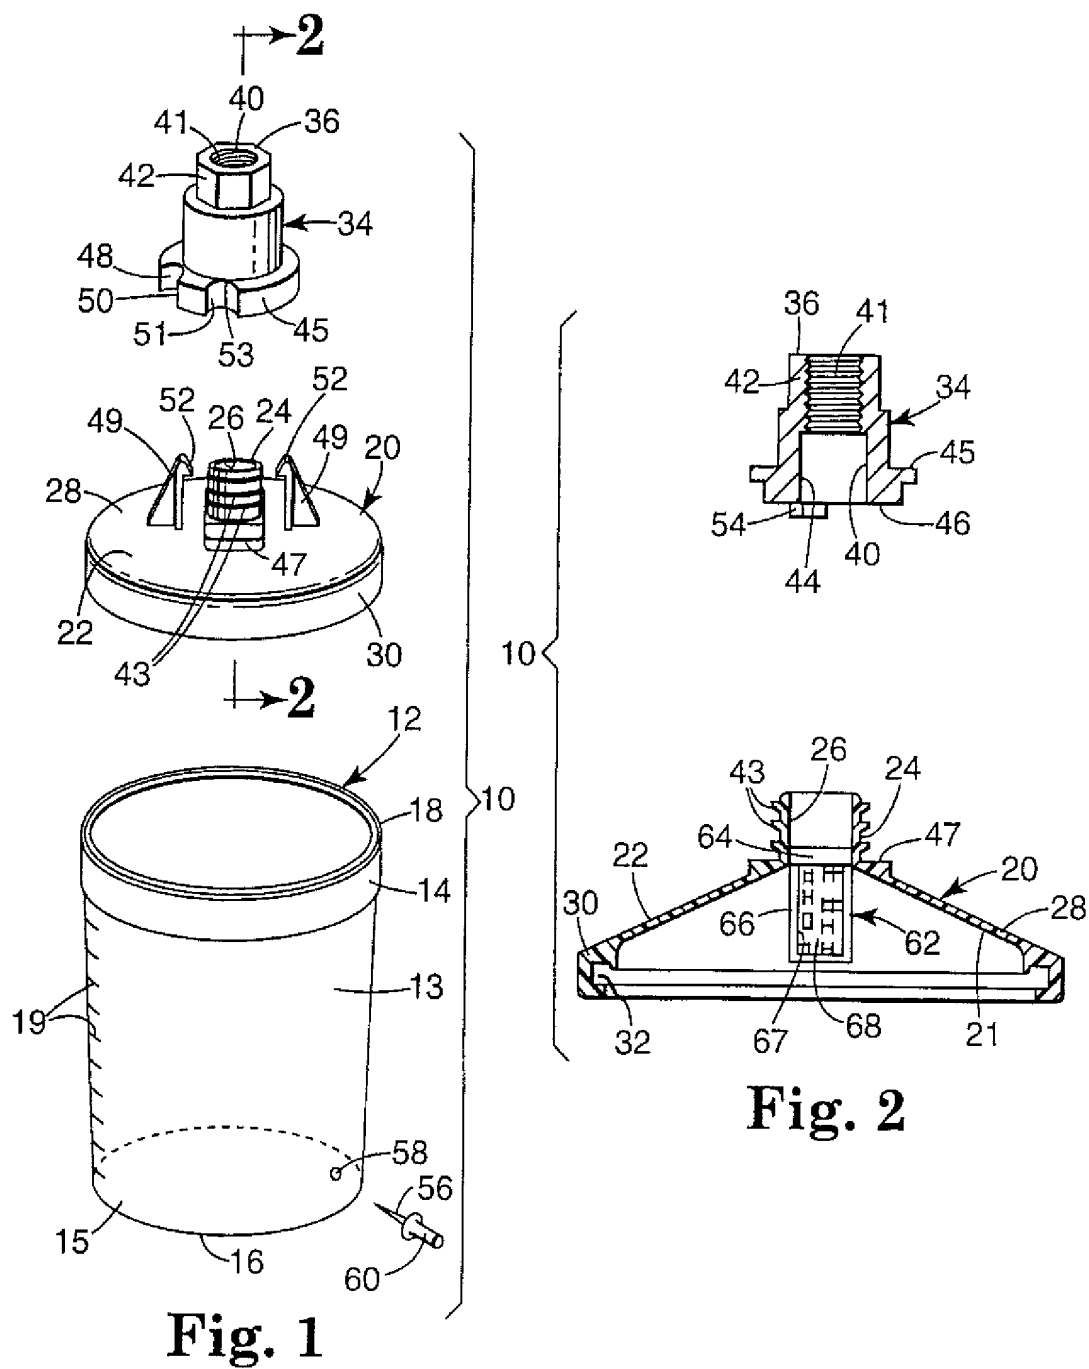

3/4

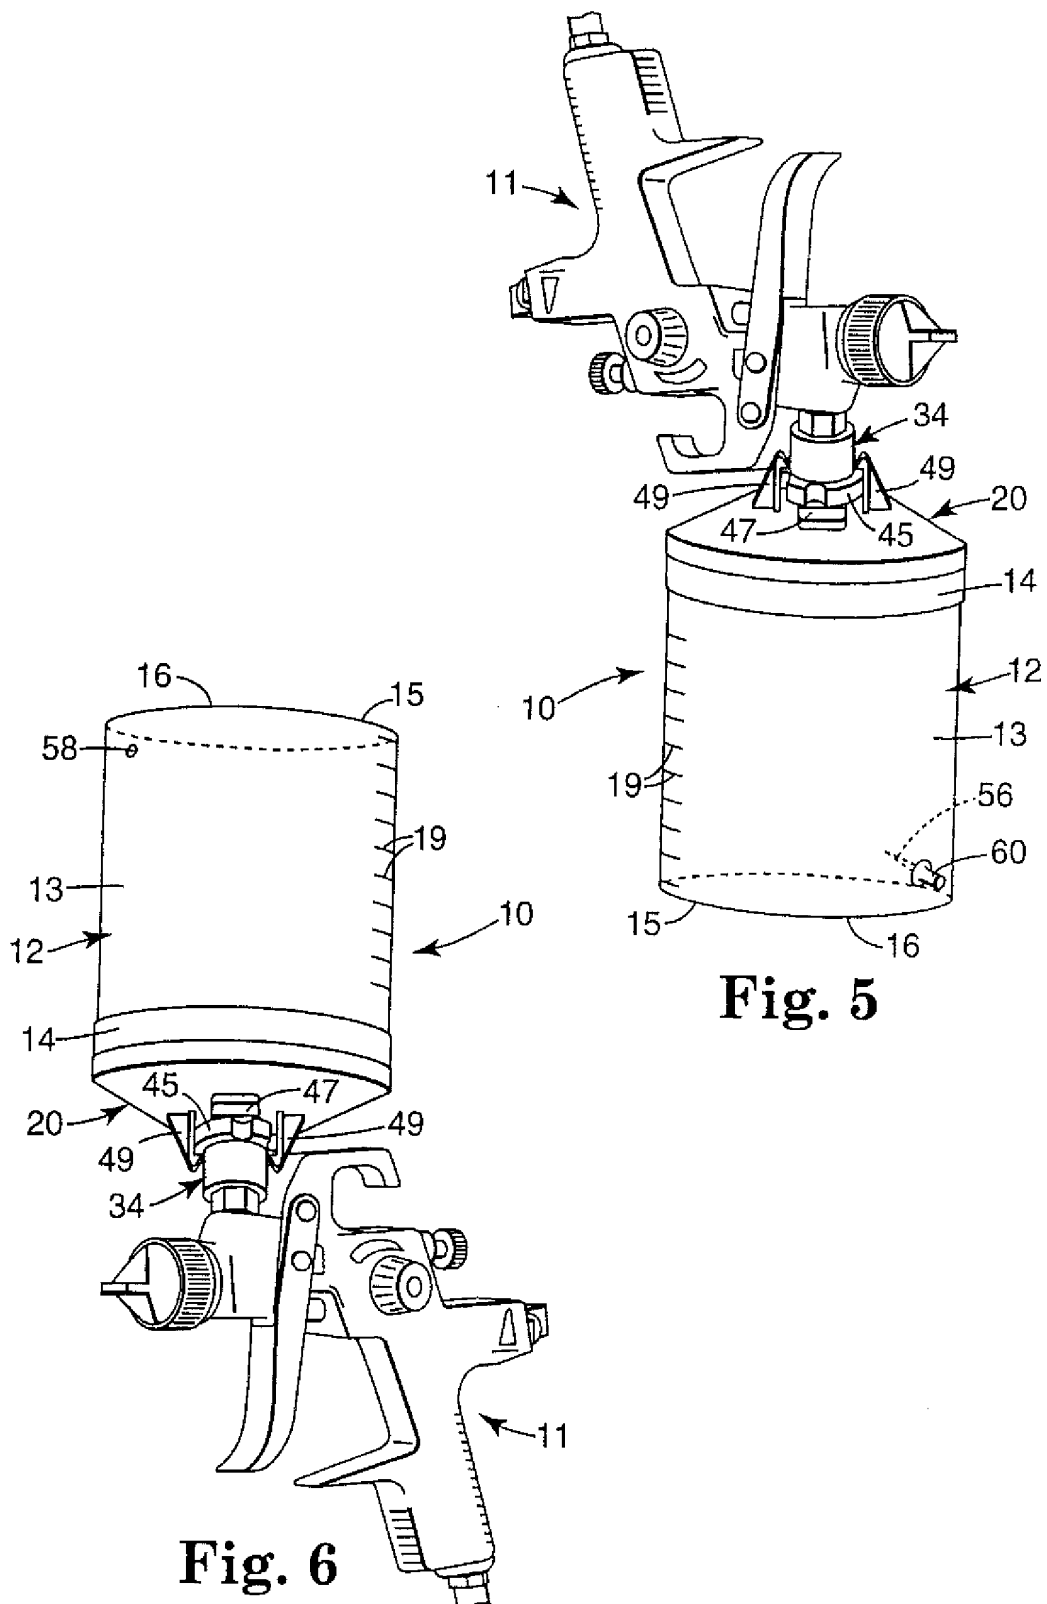

4/4

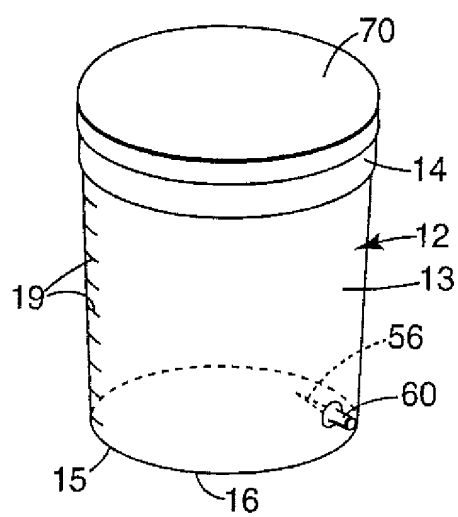**Fig. 7**

INTERNATIONAL SEARCH REPORT

In national Application No

PCT/US 00/22262

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B05B7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 32539 A (DOUGLAS, MALCOLM F. ET AL) 30 July 1998 (1998-07-30)	1,3,4,6, 7,11,12
Y	page 8, line 8 -page 13, line 15; figures ----	2,5,8,14
Y	US 2 612 404 A (ANDERSON, JOHN OLLE) 30 September 1952 (1952-09-30) column 3, line 19-24; figure 1 ----	2,5,8,14
A	US 4 811 904 A (IHMEIS, HARTMUT ET AL) 14 March 1989 (1989-03-14) column 2, line 1-32; figures -----	1,4,7,14

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

21 November 2000

Date of mailing of the international search report

07/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx: 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Innecken, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/22262

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9832539 A	30-07-1998	CN 1244141 T EP 0954381 A PL 334754 A	09-02-2000 10-11-1999 13-03-2000
US 2612404 A	30-09-1952	BE 491243 A CH 282477 A FR 995875 A GB 660523 A	30-04-1952 07-12-1951
US 4811904 A	14-03-1989	DE 3346165 A AT 41612 T AU 575890 B AU 3680384 A BR 8406639 A CA 1266376 A DE 3477351 D DK 613884 A EP 0167671 A ES 294892 U FI 844987 A IE 56404 B JP 60227857 A NO 845123 A, B, NZ 210658 A ZA 8409850 A	11-07-1985 15-04-1989 11-08-1988 27-06-1985 15-10-1985 06-03-1990 27-04-1989 22-06-1985 15-01-1986 16-10-1987 22-06-1985 17-07-1991 13-11-1985 24-06-1985 27-11-1987 28-08-1985

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for form 1449/PTO

INFORMATION DISCLOSURE STATEMENT BY APPLICANT

(Use as many sheets as necessary)

Complete if Known

Application Number

Filing Date

HEREWITH

First Named Inventor

Ewald SCHMON

Art Unit

Examiner Name

Attorney Docket Number

7400-X06-152

U. S. PATENT DOCUMENTS

[illegible]

FOREIGN PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS					
Examiner Initials*	Cite No. ¹	Foreign Patent Document	Publication Date	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages Or Relevant Figures Appear
		Country Code ³ -Number ⁴ -Kind Code ⁵ (if known)	MM-DD-YYYY		
		WO 2004/037433 A	06-06-2004	3M INNOVATIVE PROPERTIES CO.	
		WO 02/085533 A	10-31-2002	3M INNOVATIVE PROPERTIES CO. ET AL	
		DE 89 02 223 U1	04-06-1989	SATA-FARBSPRITZTECHNIK GMBH	
		DE 34 02 097 A1	08-01-1985	SATA-FARBSPRITZTECHNIK GMBH	
		WO 01/12337 A	02-22-2001	3M INNOVATIVE PROPERTIES CO.	

Examiner
Signature

Date	
Considered	

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 509. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant. ¹ Applicant's unique citation designation number (optional). ² See Kinds Codes of USPTO Patent Documents at www.uspto.gov or MPEP 901.04. ³ Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). ⁴ For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. ⁵ Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. ⁶ Applicant is to place a check mark here if English language Translation is attached.

This collection of information is required by 37 CFR 1.97 and 1.98. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.